




INNOVATIONS FOR LIVING®

700 Series FIBERGLAS™ Insulation

Product Data Sheet

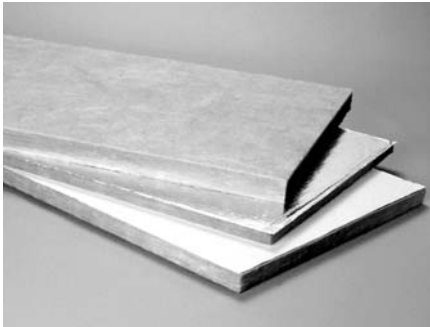

- ☐ Type 701
- ☐ Type 703
- ☐ Type 704
- ☐ Type 705
- ☐ Type 707

Description

These insulations are made of inorganic glass fibers with a thermosetting resin binder and formed into flexible, semi-rigid or rigid rectangular boards of varying densities. Types 703, 704 and 705 are available with factory-applied FRK or ASJ facings. Both facings are vapor retarders and provide a neat, finished appearance in mechanical applications.

Uses

701 – Lightweight, resilient, flexible insulation in sheet form, used on vessels with irregular surfaces where an exterior finish will be supported mechanically.
703, 704 – Semi-rigid boards for use on equipment, vessels and air conditioning ductwork.
705 – A high strength rigid board for use on chillers, hot and cold equipment, and heating and air conditioning ductwork where high abuse resistance and good appearance are required.
707 – For use in acoustical wall panels and specialized ceiling applications.

Physical Property Data

Property	Test Method	Value
Equipment Operating Temperature Limitation ¹	ASTM C 411	0 to 450°F (-18°C to 232°C)
Insulation Jacket Temperature Limitation	ASTM C 1136	-20°F to 150°F (-29°C to 66°C)
Jacket Permeance	ASTM E 96, Proc. A	0.02 perm
Jacket Burst Strength	ASTM D 774	FRK: 35 psi; ASJ: 55 psi
Compressive Strength (minimum) at 10% deformation at 25% deformation	ASTM C 165	Type 703 25 lb/ft² (1197 Pa) 90 lb/ft² (4309 Pa) Type 704 60 lb/ft² (2873 Pa) 225 lb/ft² (10.8 kPa) Type 705 200 lb/ft² (9576 Pa) —
Water Vapor Sorption	ASTM C 1104	<2% by weight at 120°F (49°C), 95% R.H.
Nominal Density	ASTM C 167	Type 701: 1.5 pcf (24 kg/m ³)
	ASTM C 303	Type 703: 3.0 pcf (48 kg/m ³)
		Type 704: 4.2 pcf (67 kg/m ³)
		Type 705: 6.0 pcf (96 kg/m ³)
		Type 707: 7.0 pcf (112 kg/m ³)
Surface Burning Characteristics ²	UL 723, ASTM E 84 or CAN/ULC-S102	
Flame Spread		25
Smoke Developed		50

1. Maximum thickness at 450°F (232°C): Type 701: 6" (152mm); Type 703, 704, 705: 4" (102mm).

2. The surface burning characteristics of these products have been determined in accordance with UL 723, ASTM E 84 or CAN/ULC-S102. This standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment which takes into account all of the factors which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating.

Availability

FIBERGLAS™ 700 Series Insulations are available in standard 24"x48" (610mm x 1219mm) boards in thicknesses from 1" (25mm) to 4" (102mm) in ½" (13mm) increments. Maximum thickness, Type 705, is 3" (76mm). Type 704 is made-to-order.

Product Attributes

Thermal Efficiency

FIBERGLAS™ 700 Series Insulations save energy and reduce heat transfer, lowering operating costs. Available in five densities, providing a selection of products to meet specific performance, appearance and economic requirements.

Structural Integrity

FIBERGLAS™ 700 Series Insulations resist damage and maintain structural integrity and efficiency. Thickness stays uniform.

Excellent Acoustical Properties

This versatile group of FIBERGLAS™ insulation boards efficiently reduces sound transmission.



INNOVATIONS FOR LIVING®

700 Series FIBERGLAS™ Insulation

Product Data Sheet

Specification Compliance

- ASTM C 553, Mineral Fiber Blanket Thermal Insulation, Type III – Type 701
- ASTM C 612, Mineral Fiber Block & Board Thermal Insulation, Types IA, IB – Types 703, 704, 705, 707
- ASTM C 795, Thermal Insulation For Use Over Austenitic Stainless Steel*
- ASTM C 1136, Flexible Low Permeance Vapor Retarders for Thermal Insulation, Type I: ASJ; Type II: FRK
- Nuclear Regulatory Commission Guide 1.36, Non-Metallic Thermal Insulation*
- New York City MEA No. 227-83 – Types 703 & 705, plain and FRK-faced
- CAN/CGSB-51.10 – Type I, Class I – Types 703, 704
- NFPA 90A and 90B
- California Insulation Quality Standards CA-T052

* Preproduction qualification testing complete and on file. Chemical analysis of each production lot required for total conformance.

Thermal Performance

ASTM C 680 (Type 703)

Thickness in. (mm)	Operating Temperature, °F (°C)									
	250 (121)		300 (149)		350 (177)		400 (204)		450 (232)	
	HL	ST	HL	ST	HL	ST	HL	ST	HL	ST
1.0 (25)	27	98	42	106	57	114	75	123	95	133
1.5 (38)	19	93	29	99	40	105	52	112	66	119
2.0 (51)	15	90	22	95	31	100	40	105	50	111
2.5 (64)	12	88	18	92	25	96	32	101	41	106
3.0 (76)	10	87	15	91	21	94	27	98	34	102
3.5 (89)	9	86	13	89	18	92	23	96	30	99
4.0 (102)	8	86	11	88	16	91	21	94	26	97

The above table provides approximate heat loss values (HL), Btu/hr•ft², and Surface Temperatures (ST), °F, for flat surfaces. Values are based on horizontal heat flow, vertical flat surface, 80°F ambient temperature, still air, ASJ jacket. To convert heat loss values to W/m², multiply values by 3.15. To convert surface temperatures, use the formula: °C = (°F-32)/1.8. For similar information using other assumptions, contact your Owens Corning Representative.

Sound Absorption Coefficients

ASTM C 423; Mounting: Type A – Material placed against a solid backing.

Product Type	Thickness		Octave Band Center Frequencies, Hz						
	in.	(mm)	125	250	500	1000	2000	4000	NRC
701, plain	1	(25)	0.17	0.33	0.64	0.83	0.90	0.92	0.70
	2	(51)	0.22	0.67	0.98	1.02	0.98	1.00	0.90
703, plain	1	(25)	0.11	0.28	0.68	0.90	0.93	0.96	0.70
	2	(51)	0.17	0.86	1.14	1.07	1.02	0.98	1.00
705, plain	1	(25)	0.02	0.27	0.63	0.85	0.93	0.95	0.65
	2	(51)	0.16	0.71	1.02	1.01	0.99	0.99	0.95
703, FRK	1	(25)	0.18	0.75	0.58	0.72	0.62	0.35	0.65
	2	(51)	0.63	0.56	0.95	0.79	0.60	0.35	0.75
705, FRK	1	(25)	0.27	0.66	0.33	0.66	0.51	0.41	0.55
	2	(51)	0.60	0.50	0.63	0.82	0.45	0.34	0.60
703, ASJ	1	(25)	0.17	0.71	0.59	0.68	0.54	0.30	0.65
	2	(51)	0.47	0.62	1.01	0.81	0.51	0.32	0.75
705, ASJ	1	(25)	0.20	0.64	0.33	0.56	0.54	0.33	0.50
	2	(51)	0.58	0.49	0.73	0.76	0.55	0.35	0.65

Values given are for design approximations only; production and test variabilities will alter results. Specific designs should be evaluated in end-use configurations.



INNOVATIONS FOR LIVING®


700 Series FIBERGLAS™ Insulation

Product Data Sheet

Thermal Conductivity

Mean Temp. °F	k, Btu·in/hr·ft²·°F				Mean Temp. °C	λ, W/m·C			
	701	703	704	705		701	703	704	705
50	0.22	0.21	0.22	0.22	10	0.032	0.030	0.032	0.032
75	0.24	0.23	0.23	0.23	25	0.035	0.033	0.034	0.034
100	0.26	0.24	0.25	0.25	50	0.040	0.036	0.038	0.037
150	0.30	0.27	0.28	0.27	75	0.045	0.040	0.042	0.041
200	0.35	0.30	0.31	0.30	100	0.052	0.045	0.046	0.045
250	0.40	0.34	0.35	0.33	125	0.059	0.050	0.051	0.049
300	0.46	0.38	0.39	0.37	150	0.067	0.055	0.056	0.053

Thermal Conductivity

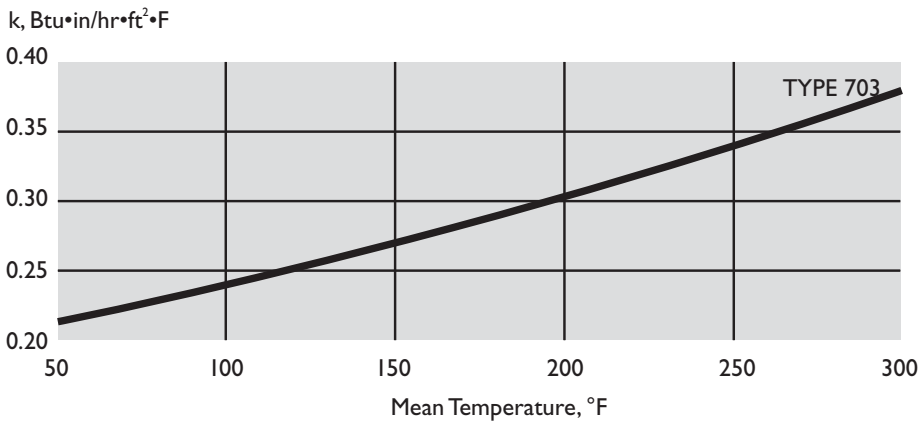

Apparent thermal conductivity curve determined in accordance with ASTM Practice C 1045 with data obtained by ASTM Test Method C 177. Values are nominal, subject to normal testing and manufacturing tolerances.

Application Recommendations

Type 701 is a lightweight, unfaced, flexible insulation in batt form for use on vessels having irregular surfaces, where the compressive strength is not a performance criterion. Types 703, 704 and 705 are board insulations usually impaled over welded pins on flat surfaces. They are cut in segments and banded in place on irregular surfaces. Unfaced boards are normally finished with reinforced insulating cement or weatherproof mastic.

ASJ- or FRK-faced insulation boards shall be applied using mechanical fasteners such as weld pins or speed clips. Fasteners shall be located not less than 3" (75mm) from each edge or corner of the board.

Pin spacing along the equipment should be no greater than 12" (300mm) on centers. Additional pins or clips may be required to hold the insulation tightly against the surface where cross bracing is used for stiffening. Weld pin lengths must be selected to ensure tight fit but avoid "oil-canning."

In multiple layer applications, use faced material on outer layer only. Where a vapor retarder is required, cover pins and clips with vapor sealing, pressure-sensitive patches matching insulation facing. Rub hard with a plastic sealing tool to ensure a tight bond and a vapor seal.



INNOVATIONS FOR LIVING®

700 Series FIBERGLAS™ Insulation

Product Data Sheet

All insulation joints should be sealed with pressure-sensitive joint sealing tape to match the insulation facing. Rub hard with a plastic sealing tool to effect a tight bond. Recommended practice suggests 3" (76mm) wide tape on flat surfaces or where edges are shiplapped and stapled. Use 5" (102mm) wide tape in lieu of shiplapping. If insulation is being applied to sheet metal duct work, all sheet metal joints must be sealed prior to insulating. Glass fabric and mastic may be used in lieu of pressure-sensitive tape.

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.



INNOVATIONS FOR LIVING®

OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659

1-800-GET-PINK®

www.owenscorning.com

Pub. No. 14775-N. Printed in U.S.A. April 2011. THE PINK PANTHER™ & ©1964-2011 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. ©2010 Owens Corning.

